

Industrial Inkjet

RICOH MH2810F

RICOH
imagine. change.


This stainless steel print head features flow through functionality offering improved jetting performance for single pass applications as well as heavily loaded inks.



Stainless Steel Print Head with Flow Through Functionality and enhanced jetting reliability

The flow through functionality of this series of stainless steel print heads enables:


- Improved handling of heavily loaded pigment inks
- Increased reliability for single pass applications
- Greater fluid temperature control
- Improved nozzle up-time performance
- Reduced printer maintenance frequency

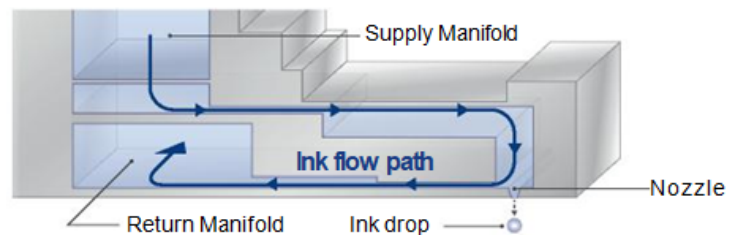

Variable drop volume capability

The multi-drop capability allows the creation of a range of drop sizes enabling grey-scale printing.

Conceptual drawing of multi-drop



Excellent durability and extended service life

Ricoh inkjet print heads are made of stainless steel. These heads are highly robust and offer excellent anti-corrosion properties for multiple inks, resulting in excellent durability and extended service life.

Support for different inks

With its built-in heater, these heads are capable of jetting high-viscosity inks. Additionally, the ink path is isolated from the actuator (piezo elements), i.e. no ink contact.

Inkjet head with support for droplet enlargement and high-viscosity inks


MH2810F




	MH2810F
Method	Piston pusher with metallic diaphragm plate
Print Width	64.861mm
Number of nozzles	384 (2 x 192 channels), staggered
Nozzle spacing (1 color printing)	1/150(0.1693 mm)
Nozzle spacing (Row to row distance)	0.9948mm
Compatible ink	UV, Solvent, Aqueous, Others. Handle heavy loaded pigmented inks
Total printhead dimensions	120(W) x 76.3(D) x 13.2(H) mm (4.72' x 3' x 0.52') excluding cables & connectors
Weight	126 g
Ink color	Mono color
Operating temperature range	Up to 80°C
Temperature control	Integrated heater and thermistor
Life	100 billion actuations per nozzle
Jetting frequency*	Binary mode : 30kHz / Grey-scale mode : 20kHz
Drop volume*	Binary mode: 27 pl / Grey-scale mode: 27 to 50pl *depending on the ink
Viscosity range	10-15 mPa·s
Surface tension	28-35mN/m
Grey-scale*	2
Total Length	257mm or 519mm including cables
Ink port	Hose Barb or O-Ring
Number of ink ports	4 Ports (2X IN/2X OUT)
Head to Head Alignment pin direction	Front or Back

* Dependent on ink and system design.

Nozzle

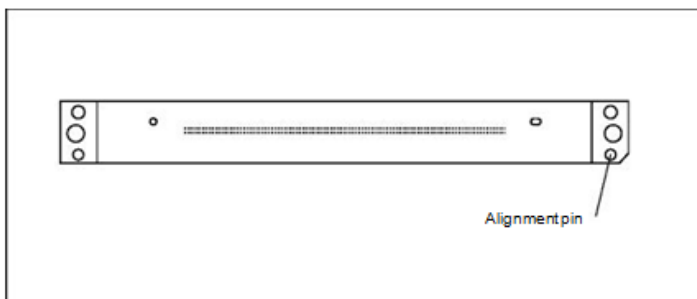

External dimensions

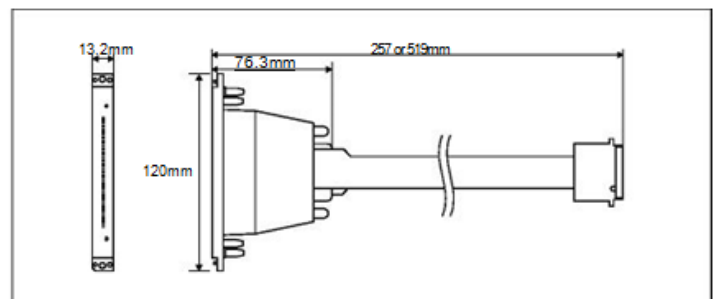

- Please contact your sales representative for details on performance, specifications, and restricting conditions, etc.

RICOH
imagine. change.

Ricoh Printing Systems America, Inc. 2390-A Ward Avenue Simi Valley, CA 93065-1875 U.S.A.
RICOH® and the Ricoh Logo are registered trademarks of Ricoh Company, Ltd. All other trademarks are the property of their respective owners. ©2015 Ricoh Printing Systems America, All Rights Reserved. The content of this document, and the appearance, features and specifications of Ricoh products and services are subject to change from time to time without notice. Products are shown with optional features. While care has been taken to ensure the accuracy of this information, Ricoh makes no representation or warranties about the accuracy, completeness or adequacy of the information contained herein, and shall not be liable for any errors or omissions in these materials. Actual results will vary depending upon use of the products and services, and the conditions and factors affecting performance. The only warranties for Ricoh products and services are as set forth in the express warranty statements accompanying them. Specifications as of August 2019.